

UHI Research Database pdf download summary

Neuron in a Box

MacLeod, Christopher

Publication date:
2019

The re-use license for this item is:
CC BY

The Document Version you have downloaded here is:
Publisher's PDF, also known as Version of record

[Link to author version on UHI Research Database](#)

Citation for published version (APA):
MacLeod, C. (2019). Neuron in a Box: A biologically feasible neural network learning paradigm. Lews Castle College.

General rights

Copyright and moral rights for the publications made accessible in the UHI Research Database are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights:

- 1) Users may download and print one copy of any publication from the UHI Research Database for the purpose of private study or research.
- 2) You may not further distribute the material or use it for any profit-making activity or commercial gain
- 3) You may freely distribute the URL identifying the publication in the UHI Research Database

Take down policy

If you believe that this document breaches copyright please contact us at RO@uhi.ac.uk providing details; we will remove access to the work immediately and investigate your claim.

Neuron in a Box: A biologically feasible neural network learning paradigm

The aim of the “neuron in a box” (NIB) algorithm is to produce a flexible biologically feasible training paradigm - into which other learning techniques may be incorporated as required. It is based on isolating a neuron to discover all the possible influences on its learning.

Consider a single biological neuron - what are its possible learning mechanisms? The answers to this question may be explored by drawing the isolated neuron - a “neuron in a box”, as shown in the figure below.

We can then write down all the *possible* parameters that could allow it to learn. After all, the neuron is only connected to other neurons and glia, so the only possible mechanisms involve either signals transmitted from other cells or chemical signals from the surrounding (interstitial) medium.

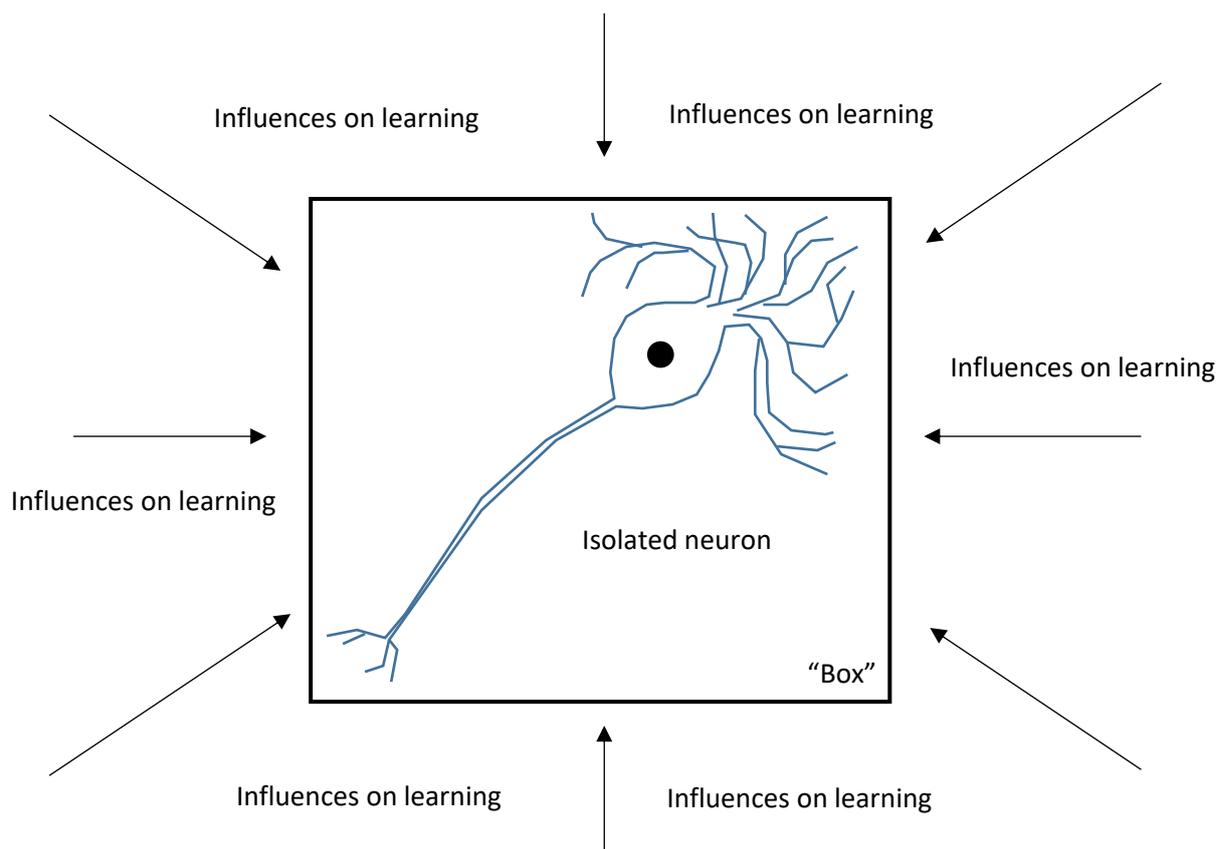


Figure: An Isolated “neuron in a box”

Some of the most important known parameters are:

- a) Biochemical. The neuron is bathed in a 'soup' of intercellular fluid. Hormonal and other stimuli can affect this soup. For example, its constituents might change in the presence of hunger, pain, fright, the urge to mate, etc (or, in a simple system, just a good / bad signal). The signal would affect whole regions, not individual synapses. Let us call this component B .
- b) Hebbian (or Anti-Hebbian). A synapse gets strengthened through use. The more activity it has, the stronger it becomes. This contribution effects each synapse individually and is therefore a matrix. Let us call this component H .
- c) Synchronous (or Anti-Synchronous). A synapse gets strengthened when it is active at the same time as others (and weakened if it is not). Like the Hebbian contribution, this is therefore a matrix. Let us call this component S .
- d) Mediated. One synapse (or a group of them) controls the strength of another one (or group).

$$M_{i,j} = aS_1 + bS_2 + cS_3 + \dots etc$$

Where a , b , c , etc are constants defined by evolution (or learned) and S_1 , S_2 , S_3 , etc, are synaptic strengths connected to the neuron. This effect may be difficult to achieve in practical terms and since there is no evidence for it from biology, you may wish to leave it out of the model.

The mathematical forms of these learning mechanisms have not been expounded in exhaustive detail above because they are reasonably obvious. One of the advantages of this technique is that the programmer may choose to add one of the traditional artificial learning methods to (or instead of) those detailed above and if newly discovered or invented mechanisms become apparent, they can be added as well. The total learning contribution to the weight matrix could be expressed as:

$$\mathbf{W}^+ = \mathbf{W} + \eta(c_1B(c_2\mathbf{H} + c_3\mathbf{S}))$$

Where \mathbf{W}^+ is the new (updated) weight matrix, η is the learning rate, c_n is the sensitivity to the individual learning types and \mathbf{W} is the old weight matrix.

These mechanisms are highly dependent on network topology - after all, a synchronous or mediated learning strategy will only work with neurons that are placed in the correct positions within networks. It is easy to see that in other positions they could have no effect or cause the network to deviate away from the required response. They are therefore particularly suitable for use with networks whose topology is defined using evolutionary mechanisms. This topology dependence may be the reason why it has been so difficult to implement biologically feasible learning mechanisms in ANNs.

The training algorithm sets up the parameters listed above using an evolutionary algorithm and then the network is allowed to perform its tasks in the chosen system (which required an adaptive or learned response) for a set period of time. The network's performance at the end of this period is its fitness. Obviously, this system is particularly designed for systems which have an inherent need for flexible learning algorithms in their operation.

References:

The algorithm was first outlined in:

MACLEOD, C., MCMINN, D., REDDIPOGU, A. B., CAPANNI, N. F. and MAXWELL, G. M., 2001. Evolution and devolved action: towards the evolution of systems. In: Appendix B of MCMINN, D. Using evolutionary artificial neural networks to design hierarchical animat nervous systems, Ph. D. thesis. Aberdeen : Robert Gordon University.

<https://openair.rgu.ac.uk/handle/10059/419>

And was used in experiment into evolutionary modular neural networks for robotic control, outlined in:

MACLEOD, C., 2010. Practical algorithms for incremental growth. Aberdeen: Robert Gordon University.

<https://openair.rgu.ac.uk/handle/10059/471>